



Uptown Coil Spring Rocker

RXWD-25/156393

Assembly Instructions

Step 1: Remove protective wrapping first. Then lay all parts on floor and identify all parts packed in carton against attached parts list.

Step 2: Insert threaded tube end of coil spring on both sides of the base through double loop channel on both sides of the seat bucket(A). Secure attachment with hex nut (C), spring waster (D), and washer (E) to end of threaded tube. Use Hex Wrench (J) to tighten the nut.

Step 3: Make sure all nuts are aligned properly and tightened sufficiently. Then place nut covers over nuts

NOTE: IT IS USER'S RESPONSIBILITY TO MAKE SURE ALL PARTS ARE ASSEMBLED AND TIGHTENED PROPERLY AND SECURELY.

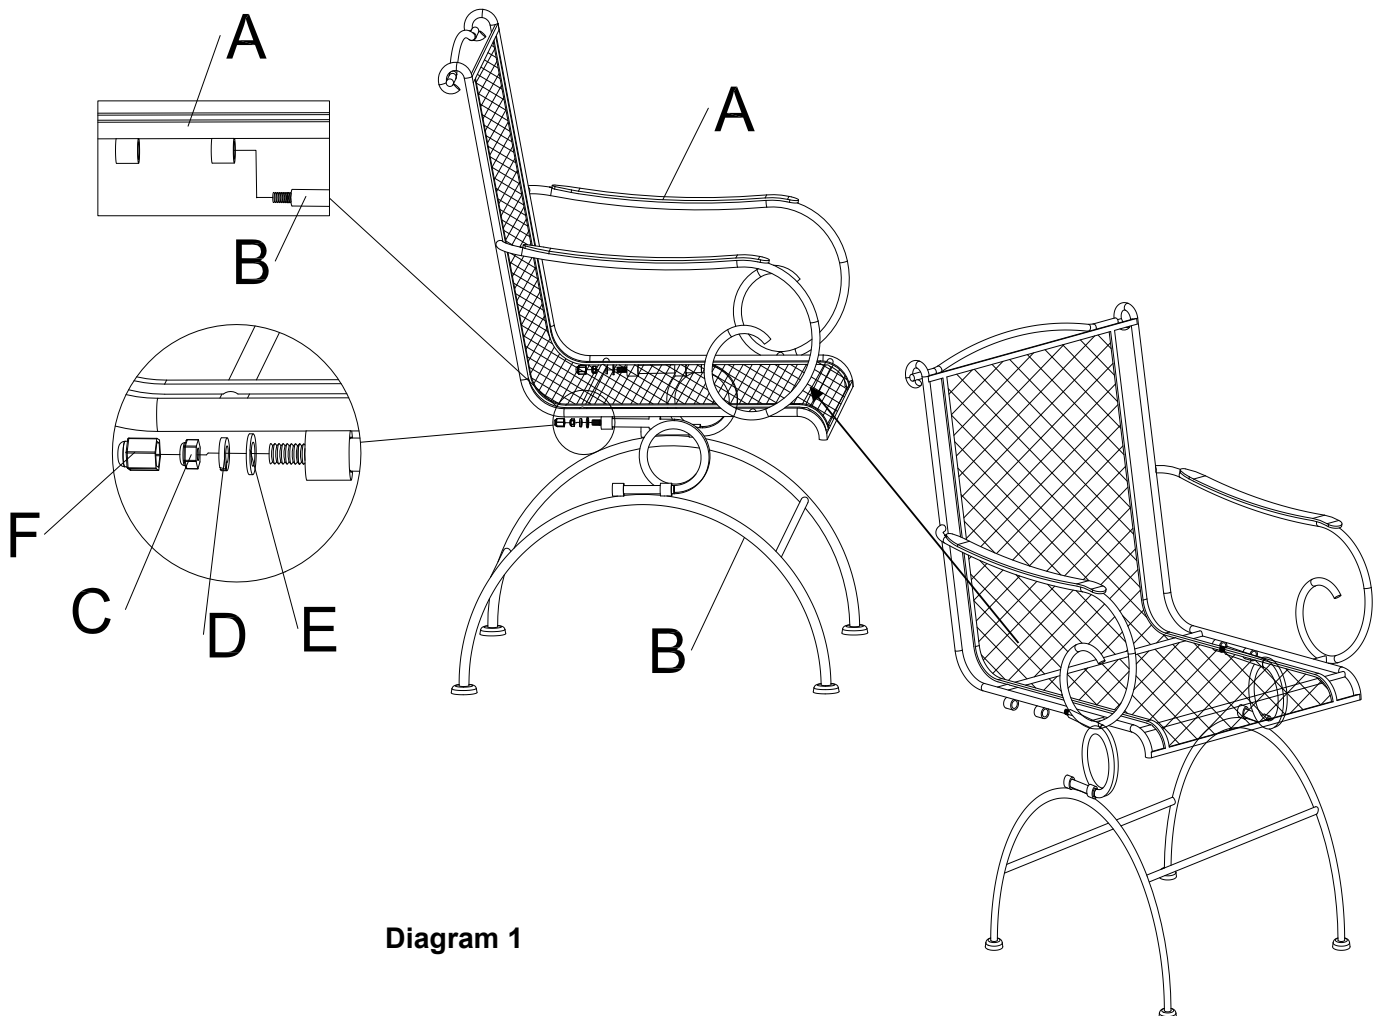


Diagram 1











Diagram 2

PARTS LIST

Ref	Part Name	Part Image	Qty	Ref	Part Name	Part Image	Qty
A	Seat Bucket		1	E	Washer		2
B	Base		1	F	Nut Cover		2
C	Hex Nut(M 5/16")		2	J	Hex Wrench		1
D	Spring Washer		2				

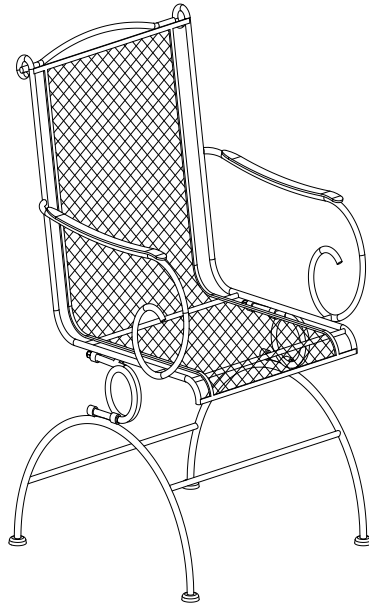WOODARD
Customer Service Hours
8:00am-5:00pm CST Monday to Friday
Phone: (800) 877-2290 Fax: (800) 733-4257

PRINTED IN CHINA